


AC ADAPTER PART NUMBER CONFIGURATION


1. WALL MOUNT AC ADAPTER

TRXXXX-X-XXXXX

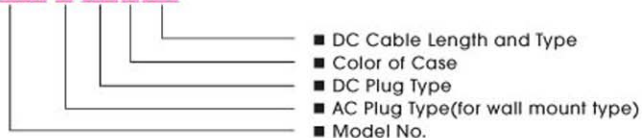

2. DESK TOP AC ADAPTER

TRXXXXX-XXXXX



DC-Plug Type (standard Options)

01	5.5 x 2.1 x 12mm	Right Angle	Inner + Outer - + - -
02	5.5 x 2.5 x 12mm	Right Angle	Inner + Outer - + - -
03	5.5 x 2.1 x 12mm	Right Angle	Inner - Outer + - - +
04	5.5 x 2.5 x 12mm	Right Angle	Inner - Outer + - - +
11	5.5 x 2.1 x 12mm	Straight	Inner + Outer - + - -
12	5.5 x 2.5 x 12mm	Straight	Inner + Outer - + - -
13	5.5 x 2.1 x 12mm	Straight	Inner - Outer + - - +
14	5.5 x 2.5 x 12mm	Straight	Inner - Outer + - - +
21	5.5 x 2.5 x 9.5mm	Right Angle	Inner + Outer - + - -
22	5.5 x 2.5 x 9.5mm	Right Angle	Inner - Outer + - - +
23	5.5 x 2.1 x 9.5mm	Straight	Inner + Outer - + - -
31	3.5 x 1.35 x 7.5mm	Right Angle	Inner + Outer - + - -
32	5.5 x 2.1 x 7.5mm	Straight	Inner + Outer - + - -
35	4.0 x 1.7 x 9.5mm	Straight	Inner + Outer - + - -

Color of Case

A	Black Case	E	Black Case w/OVP
---	------------	---	------------------

Cable Length and Type for TR500/10R/15 Series

01	720mm	20AWG / UL2468
02	1200mm	20AWG / UL2468
03	1800mm	20AWG / UL2468
11	720mm with Ferrite Core	20AWG / UL2468
12	1200mm with Ferrite Core	20AWG / UL2468
13	1800mm with Ferrite Core	20AWG / UL2468

AC Plug Type (for wall mount type)

A	USA 2Pin
S	Australia 2Pin
U	British 3Pin
E	Europe 2Pin

Note: The cable of TR1505/TR1506 is 18AWG/SPT1.

Cable Length and Type for TR25/20B Series

01	720mm	18AWG / SPT1
02	1200mm	18AWG / SPT1
03	1800mm	18AWG / SPT1
11	720mm with Ferrite Core	18AWG / SPT1
12	1200mm with Ferrite Core	18AWG / SPT1
13	1800mm with Ferrite Core	18AWG / SPT1

Cable Length and Type for TR36/45/70 Series

01	720mm	18AWG / UL1185
02	1200mm	18AWG / UL1185
03	1800mm	18AWG / UL1185
11	720mm with Ferrite Core	18AWG / UL1185
12	1200mm with Ferrite Core	18AWG / UL1185
13	1800mm with Ferrite Core	18AWG / UL1185

Note: The cable of TR45A05 is 16AWG/UL1185.

Cable Length and Type for TR100 Series

11	720mm with Ferrite Core	16AWG / UL2464	(Standard Type)
12	1200mm with Ferrite Core	16AWG / UL2464	(Standard Type)
13	1800mm with Ferrite Core	16AWG / UL2464	(Standard Type)
21	720mm with two Ferrite Core	16AWG / UL2464	
22	1200mm with two Ferrite Core	16AWG / UL2464	
23	1800mm with two Ferrite Core	16AWG / UL2464	

Note: TR25D series DC-Plug Type part number is excluded. Please contact for further information.

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.